



# CHECK VALVES- WELDED BONNET- FULL PORT (Y TYPE)

BONNEY FORGE

**800 LTD.**

**1690 LTD.**

**Design construction:**


ASME B16.34 Limited Class - BS 5352  
Testing according to API 598  
Marking MSS SP25  
Body bonnet weld to ASME IX  
Spring on request only  
Socket Weld Ends to ASME B16.11  
Screwed Ends (NPT) to ASME B1.20.1  
Butt Welding Ends to ASME B16.25

Ratings:

- carbon steel class 800    2000 psig @ 100°F  
  138 bar + 38°C
- carbon steel class 1690    4225 psig @ 100°F  
  291 bar + 38°C



Ball

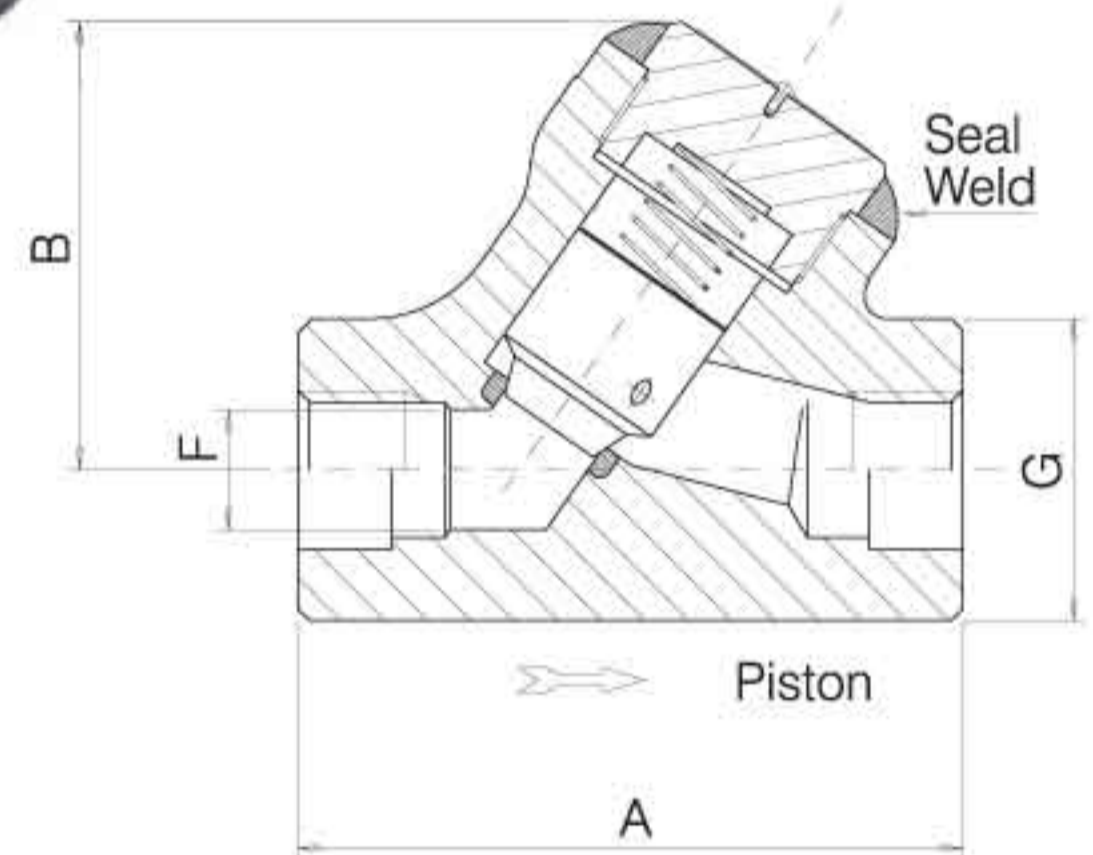

800 LTD.									
FULL PORT – FIG. Y 40 - Y 50									
SIZE	inch mm	1/4 6	3/8 10	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50
A	inch mm	3.35 85	3.35 85	3.35 85	4.13 105	4.72 120	6.5 165	6.5 165	7.48 190
B	inch mm	2.76 70	2.76 70	2.76 70	3.54 90	3.93 100	5.12 130	5.12 130	6.3 160
F	inch mm	.28 7	.35 9	.51 13	.69 17.5	.89 22.5	1.16 29.5	1.38 35	1.77 45
G	inch mm	1.50 38	1.50 38	1.50 38	1.89 48	2.20 56	3.07 78	3.07 78	3.35 85
Weight	lb.	2.5	2.5	2.5	5	6.5	17.5	17.5	26.25
	kg	1.2	1.2	1.2	2.3	3	8	8	12

1690 LTD.									
FULL PORT – FIG. 1690Y 40 - 1690Y 50									
SIZE	inch mm	1/4 6	3/8 10	1/2 15	3/4 20	1 25	1 1/4 32	1 1/2 40	2 50
A	inch mm	3.35 85	3.35 85	4.13 105	4.72 120	6.5 165	6.5 165	7.48 190	8.66 220
B	inch mm	2.76 70	2.76 70	3.54 90	3.93 100	5.12 130	5.12 130	6.3 160	7.68 195
F	inch mm	.28 7	.35 9	.47 12	.59 15	.79 20	1.06 27	1.26 32	1.57 40
G	inch mm	1.50 38	1.50 38	1.89 48	2.20 56	3.07 78	3.07 78	3.35 85	3.74 95
Weight	lb.	2.5	2.5	5.25	7.75	20.5	28.5	29.75	39.5
	kg	1.2	1.2	2.4	3.6	9.3	13	13.5	18